




BEARING de Mexico?S.A.

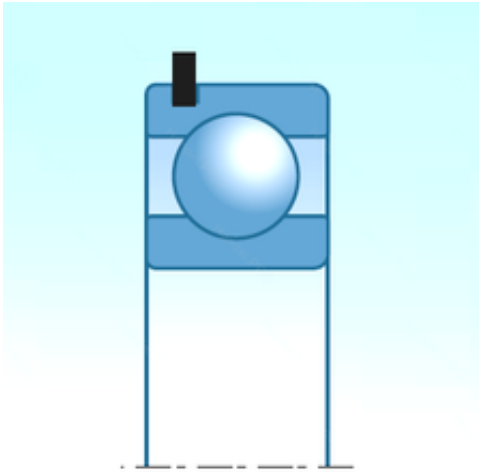

6310LLUNR Bearing 2D drawings and 3D CAD models

50,000 mm x 110,000 mm x 27,000 mm NTN
6310LLUNR Rigid ball bearings

Bearing No. 6310LLUNR

Size	50x110x27 mm
Bore Diameter	50,000 mm
Outer Diameter	110,000 mm
Width	27,000 mm
d	50,000 mm
D	110,000 mm
B	27,000 mm
C	27,000 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359664614
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	Yes
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric



BEARING de Mexico?S.A.

Long Description	50MM Bore; 110MM Outside Diameter; 27MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal With Snap Ring -20 To 120 Deg C
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6310LLUNR
Weight / LBS	2.36
Outside Diameter	4.331 Inch 110 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Bore	1.969 Inch 50 Millimeter
Outer Race Width	1.063 Inch 27 Millimeter
bore diameter:	50 mm
static load capacity:	38500 N
outside diameter:	110 mm
precision rating:	ISO Class 0
overall width:	27 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel



BEARING de Mexico?S.A.

row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	27 mm
snap ring included:	With Snap Ring
outer ring width:	27 mm
internal clearance:	CN
maximum rpm (grease):	4200 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	2 mm
dynamic load capacity:	62000 N
manufacturer product page:	Click here